



WRIGHT™

GET THE JOB DONE.

BEST WAY TO GET THE JOB DONE.

Wright mowers are built for landscapers who are also entrepreneurs and understand productivity and profitability. Our team in Maryland works relentlessly to turn your feedback into reality. We are honored by the thousands of landscapers who have invested in a Wright mower and engaged in supporting us.





EVERY DETAIL OF THE MACHINE IS REFINED TO **SERVE YOU.**

The Stander is a **game-changer**, designed by a landscaper who saw a better way to get the job done. Our owners say that they are less fatigued and making more money at the end of the day.

PROFIT

Stand on mowers are known to be one of the top performing mowers. Every additional quality job you complete in the day is more money in your pocket.

COMPACT

You can handle tight spaces meaning less time cleaning up these areas with a trimmer and more mowers on a smaller trailer.

VISIBILITY

Unobstructed 360° view allowing you to work faster and avoid obstacles.

STABILITY

Wright mowers are lower to the ground giving you faster turns and better control on hills.

BAIL-OUT

Because you are standing behind the mower and not trapped by seat, arm-rests, or control levers you have more options.

ERGONOMICS

Well positioned and easy to use controls and soft suspension platforms means more energy at the end of the day.

LOW MAINTENANCE

You can focus on your season without daily distractions.

UPTIME

A solid warranty, heavy-duty construction, and instant support are all here to keep you going during the peak season.



“Every mower we create is built with a purpose – to improve the work and lives of professional landscapers. We started out as a landscaping company that needed better equipment, so we designed and created it. Today we are a team aligned to serve your needs. This means that every part of every mower we build has you in mind. This is why we are committed to standing.”

- Ed Wright,
Vice President

STANDER[®] B





BASIC & PRODUCTIVE.

The all new Stander® B gives the performance that Wright Standers are known for in a much higher value package. Compact, maneuverable, easy to use, and low maintenance. Ideal for the startup landscaper or part time professional.



Rubber chute deflector.



Suspension platform.



Storage bin.



11ga Laminated deck construction with reinforced nose.



Easy access to service (hinging pad and rear shield).



Floating deck and easy to use height selector.

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
48" Kawasaki® FS651 22hp 52" Kawasaki® FS651 22hp	Transmission Hydro-gear® ZT-3100	Fuel Capacity 5 gal. Speed 7 mph Acres/Hour 48: 3.3 52: 3.6	Rear 20 x 10 - 8 4 ply Front 11 x 4 - 5 4 ply pneumatic	Length / Width 48: 65.75" / 49" 52: 65.75" / 53" Weight 48: 780 lbs. 52: 800 lbs.	Cut Height Range 2" - 5" floating Construction Square Nosed 11 Gauge Lamine Blades 48: 16.5" (3) 52: 18" (3)

*chute up dimensions

STANDER[®] I





COMPACT & MANEUVERABLE.

Ideal for medium to small sized lawns where you need maximum productivity in a lightweight and compact footprint. With balanced weight distribution and being so light weight, the Intensity™ is the most nimble stand on. Feature rich and powerful, the Intensity delivers high performance season after season.



36" and 42" deck models are great for small properties.




Fully floating deck and suspension platform offers an upgrade from fixed frame.



Serrated teeth on deck edge gather grass for max cutting width



Platform is fully between the wheel motors placing your weight precisely where it needs to be, which is critical to the balance of a narrow and nimble machine.

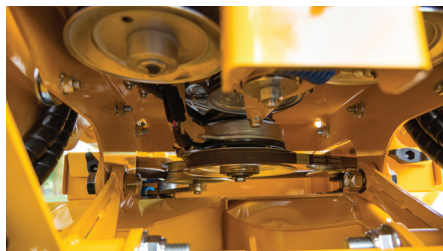

Engine floats with the deck. Moving the engine with the deck means no excessive belt wear whether cutting Bermuda Grass at 1.25" or St. Augustine at 5".



Compact caster placement allows for less trimming in tight areas.

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
36" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kohler® ZT710 20.2HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal.	Rear 36: 18 x 8.5 - 10 42: 18 x 8.5 - 10 48: 18 x 10.5 - 10 52: 18 x 10.5 - 10	Length / Width 36: 62" / 36.5" 42: 70" / 42.5" 48: 59.75" / 49" 52: 59.75" / 53"	Cut Height Range 1" - 5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 36: 18" (2) 48: 16.5" (3) 42: 21" (2) 52: 18" (3)
42" Kawasaki® FX600 19HP		Speed 8.2 mph Acres/Hour 36: 3.02 42: 3.52 48: 4.06 52: 4.39			
48" Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP Kohler® ZT730 22.1HP			Front 11 x 4 - 5	Weight 36: 717 lbs. - 728 lbs. 42: 740 lbs. 48: 805 lbs. 52: 816 lbs.	

*chute up dimensions

SPORT™ I





COMPACT & SEAT.

Ideal for medium to small sized lawns where you need productivity in a lightweight and compact footprint with a seat option. With balanced weight distribution and being so light weight, the Intensity™ is one of the most nimble mowers. Feature rich and powerful, the Sport Intensity delivers high performance season after season.



36" and 42" Aero Core deck models are great for small properties.



Fully floating Aero Core deck and suspension platform offers an upgrade from fixed frame.



Sport™ models include seat for comfort on larger properties.



Balanced weight distribution improves traction on hills and slippery slopes.



Quick Select Deck Height in 1/4" increments from 1"-5"



Ball Bearing Controls provide tactile feedback where it matters most

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
36" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kohler® ZT710 19HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 8.2 mph Acres/Hour 36: 3.02 48: 4.06 52: 4.39	Rear 36: 18 x 8.5 - 10 48: 18 x 10.5 - 10 52: 18 x 10.5 - 10 Front 11 x 4 - 5	Length / Width 36: 65.5" / 36.5" 48: 63.75" / 49" 52: 63.75" / 53" Weight 36: 772 lbs. 48: 860 lbs. 52: 871 lbs.	Cut Height Range 1" - 5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 36: 18" (2) 48: 16.5" (3) 52: 18" (3)

*chute up dimensions

STANDER[®] X





VERSATILE & INTERMEDIATE.

Built on decades of continuous development, the Stander® X Gen2 is the latest in stand on technology. Every detail is refined to give a superior mowing experience. Progressive platform suspension for all-day comfort, ball-bearing controls give tactile feedback, and a robust electrical system for maximum uptime. These details combine to create a cohesive high-performance mower. Look no further than the Stander® X Gen2 for a mid-size commercial grade workhorse.



Larger section 1 ½" x 2 ½" thick wall frame tube makes for a stiffer chassis.



Best medium sized Stander®. Sized between a walk behind and a rider, but more productive than both.



Suspension platform for a plush, comfortable ride. Elastomer springs are resilient and durable.



Large chrome ball rod ends, hinging control linkages, and ball bearing control pivots mean the controls are smooth, soft, and will last many years without getting loose.



Premium electrical system with as few wires and parts as possible so you have less to go wrong.



8 Gal fuel tank. Very thick and solid construction is puncture resistant and bolted down to the frame. White face fuel gauge is hermetically sealed and magnetically controlled by sender inside tank.

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
48" Kawasaki® FX730 23.5HP 52" Briggs & Stratton 49E8 28HP Kohler® ECV749 26.5HP Kawasaki® FX730 23.5HP 61" Kohler® ECV749 26.5HP Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans Motors Danfoss 15 cu in	Fuel Capacity 8 gal. Speed 9.5 mph Acres/Hour 48: 4.7 52: 5.09 61: 5.95	Rear 20 x 10 - 8 Front 13 x 5 - 6	Length / Width 48: 65" / 49" 52: 66" / 53" 61: 67" / 62" Weight 48: 900 lbs. 52: 920 lbs. 61: 980 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 48: 16.5" (3) 52: 18" (3) 61: 21" (3)

*chute up dimensions

SPORTTM X





VERSATILE & SEAT.

Built on decades of continuous development, the Sport X™ Gen2 is the latest technology. Every detail is refined to give a superior mowing experience. Progressive platform suspension for all-day comfort and suspension seat option mean you can sit or stand. These details combine to create a cohesive high-performance mower.



Heavy duty front casters with sealed bearings and flat free tires.



Rubber chute deflector and Aero Core deck.



Comfortable and adjustable suspension seat for all day productivity.



The Sport X uses the same primary running gear as the legendary Stander X.



Built to be balanced, the Sport X is able to productively mow both hillsides and tight areas.



8 Gal fuel tank. Very thick and solid construction is puncture resistant and bolted down to frame. White face fuel gauge is hermetically sealed and magnetically controlled by sender inside tank.

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
48" Kawasaki® FX730 23.5HP 52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans Motors Danfoss 15 cu in	Fuel Capacity 8 gal. Speed 9.5 mph Acres/Hour 48: 4.7 52: 5.09 61: 5.95	Rear 20 x 10 - 8 Front 13 x 5 - 6	Length / Width 48: 68" / 49" 52: 68" / 53" 61: 70.5" / 62" Weight 48: 951 lbs. 52: 961 lbs. 61: 1031 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 48: 16.5" (3) 52: 18" (3) 61: 21" (3)

*chute up dimensions

STANDER[®] ZK





ULTIMATE & POWERFUL.

When we developed the ZK, nothing was held back. The result is the most productive and versatile large frame mower ever built. Big bore EFI engines provide power without compromising efficiency. High flow hydraulics propel high traction 23" or 24" tires for excellent hill holding, and dual sided fuel tanks provide all-day run time. Take on your next season with a ZK. It's the ultimate stand on mower. Period.




Suspension Platform for a plush, comfortable ride. Elastomer springs are resilient and durable.




Dual wheel option available for extra traction and awesomeness on the 72".



Dual fuel tanks hold 15.5 gal of fuel reducing the need to fill up with portable gas cans.

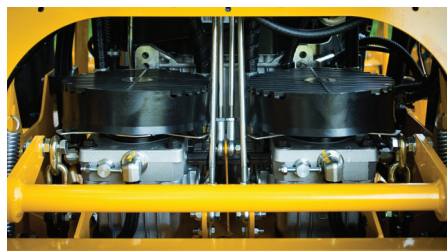

High capacity 16 CC Hydro Pumps with large cooling fans keep oil temps down.

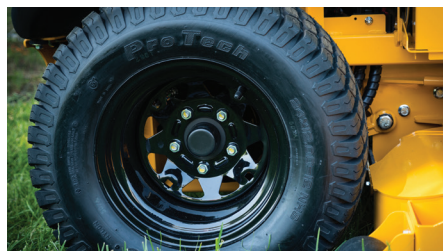

Upgrading from the Stander® X gives ultimate productivity with large tires, more power, higher speeds, and more fuel capacity.



More compact than a zero turn rider yet much more productive and light-weight. Ideal for operations where good help is hard to find and a high performance machine can offset the need for more crews and trucks.

SPECS

Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
52" Briggs & Stratton 61E8 37HP Kawasaki® FX850 27HP	Pumps Hydro-gear® 16 cc with fans	Fuel Capacity 15.5 gal.	Rear 52: 23 x 10.5 - 12 61: 24 x 12 - 12 72: 24 x 12 - 12	Length / Width 52: 67" / 53" 61: 69.5" / 62" 72: 72" / 73"	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 52: 18" (3) 61: 21" (3) 72: 24.5" (3)
61" Briggs & Stratton 61E8 37HP Kawasaki® FX850 27HP	Motors Hydro-gear® 15 cu in Intg. brake, Indiv. hydro rsrv.	Speed 12.5 mph	Front 13 x 6.5 - 6	Weight 52: 1036 lbs. - 1062 lbs. 61: 1124 lbs. 72: 1202 lbs.	
72" Briggs & Stratton 61E8 37HP		Acres/Hour 52: 6.69 61: 7.83 72: 9.22			

*chute up dimensions

STANDER[®]





TOUGH & ROBUST.

Tough and nimble, the Stander® is ideal for mid-size lawns. Its balanced construction makes it excel on hillsides and challenging terrain. The fixed deck design eliminates many moving parts making it rugged and reliable.



Fixed deck keeps operating costs down and provides a frame that can outlast many engines.



Easy to service with very simple and common parts.



Large engines for the deck size keeps blade tip speeds up, doesn't struggle with hills, and affords the unit the power to bag well.



Mower can be setup to cut high or low by adjusting the wheel motor brackets and caster arm mounts. Smaller adjustments can be made with the caster spacers.



Narrow machines can have a hard time with enough traction to turn quickly. Having a lightweight machine with the operator platform, engine, fuel tank, and battery all near the zero turn point makes this mower very agile.



No rear overhanging engine or handlebars which allows you to drive into a 90 degree corner and turn without backing up. Critical time saver for backyard areas.

SPECS

	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
SM	32" Kawasaki® FS541 15HP Kawasaki® FS600 18.5HP Kohler® ZT710 20.2HP 36" Kawasaki® FS541 15HP Kawasaki® FS600 18.5HP Kohler® ZT710 20.2HP	Pumps Hydro-gear® 10 cc with fans Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 7.5 mph Acres/Hour 32: 2.54 36: 2.77	Rear 32: 18 x 6.5 - 8 36: 18 x 8.5 - 8 Front 11 x 4 - 5	Length / Width 32: 58" / 33.5" 36: 60" / 36.5" Weight 32: 639 lbs. - 650 lbs. 36: 650 lbs. - 661 lbs.	Cut Height Range 32-36: 1.75" - 4.5" 48-61: 1.25" - 5" Type Fixed-side discharge Construction 32-36: Standard, 7 Ga. Steel 48-61: Aero Core™, 7 Ga. Steel
LG	48" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP 52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans Motors Danfoss 15 cu in	Fuel Capacity 5.5 gal. Speed 9.5 mph Acres/Hour 48: 4.7 52: 5.09 61: 5.95	Rear 20 x 10 - 8 Front 13 x 5 - 6	Length / Width 48: 59.25" / 49" 52: 59.87" / 53" 61: 62.5" / 62" Weight 48: 849 lbs. 52: 871 lbs. 61: 1003 lbs.	Lift System Shims, Fixed Deck Blades 32: 16.5" (2) 52: 18" (3) 36: 18" (2) 61: 21" (3) 48: 16.5" (3)

*chute up dimensions

VELKE™ GEAR/HYDRO





RUGGED & SIMPLE.

The Wright Velke™ provides long lasting ruggedness with fixed decks and flat-free casters. The WWH pistol grip provides smooth and powerful hydro controls while the WVG gives you low operating cost options.



Ideally balanced.




Sulky latch integrated into instrument panel.



Solid traditional design.



5.5 gal fuel capacity, much more than comparable machines.

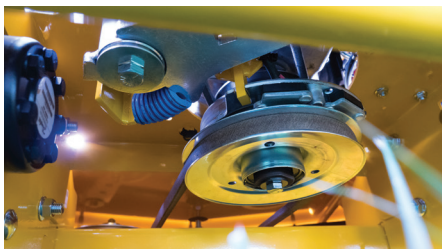

Rear axle can be adjusted up or down to set the mower in high or low ranges of cut. Fine adjustment may be made with the blade spacers or caster spacers.



Deck bracing provides years of solid use without deck cracking.

SPECS

	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
GEAR	32" Kawasaki® FS541 15HP 36" Kawasaki® FS541 15HP 48" Kawasaki® FS541 15HP	Gear Box Peerless 5 speed with reverse	Fuel Capacity 5.5 gal. Speed 4.5 mph Acres/Hour 32: 1.52 36: 1.66 48: 2.23	Rear 32: 13 x 5 - 6 36: 13 x 6.5 - 6 48: 13 x 6.5 - 6 Front 9 x 3.5 - 4	Length / Width 32: 74" / 33.5" 36: 79" / 36.5" 48: 70" / 49" Weight 32: 485 lbs. 36: 518 lbs. 48: 562 lbs.	Cut Height Range 1.5" - 4.25" Type Fixed-side discharge Construction Standard, 7 Gauge Steel Lift System Shims, Fixed Deck Blades 32: 16.5" (2) 48: 16.5" (3) 36: 18" (2)
HYDRO	32" Kawasaki® FS541 15HP 36" Kawasaki® FS541 15HP 48" Kawasaki® FS600 18.5HP 52" Kawasaki® FS600 18.5HP	Pumps Hydro-gear® 10 cc with fans Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 32: 6.5 mph 36/48/52: 7.2 mph Acres/Hour 32: 2.2 48: 3.56 36: 2.65 52: 3.85	Rear 32: 16 x 4.8/4 - 8 36: 18 x 6.5 - 8 48: 18 x 8.5 - 8 52: 18 x 8.5 - 8 Front 9 x 3.5 - 4	Length / Width 32: 72" / 33.5" 36: 74" / 36.5" 48: 69" / 49" 52: 71.5" / 53" Weight 32: 540 lbs. 48: 694 lbs. 36: 562 lbs. 52: 717 lbs.	Cut Height Range 1.5" - 4.25" Type Fixed-side discharge Construction Standard, 7 Gauge Steel Lift System Shims, Fixed Deck Blades 32: 16.5" (2) 48: 16.5" (3) 36: 18" (2) 52: 18" (3)

*chute up dimensions

VELKETM HC/LC/GC





LIGHT & COMFORTABLE.

The WVGC, WVHC, and WVLC series walkbehinds offers you a range from lower cost gear drive, medium range hydro, and large frame hydros with the same easy to use controls and floating decks (except 32").



Blend of simple and traditional design with innovative features.



Ergo grip controls are mounted on rubber mounts to soften impact and vibration.



Handles positioned to protect the hands from impact against fences or walls.



No secondary pump linkages. Control rods are directly connected to the pump arm giving precise and soft control of the pumps.

SPECS

	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
HC	32" Kawasaki® FS600 18.5HP 36" Kawasaki® FS600 18.5HP 48" Kawasaki® FS600 18.5HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 5.5 mph Acres/Hour 32: 1.86 48: 2.72 36: 2.03	Rear 32: 16 x 6.5 - 8 36: 16 x 7.5 - 8 48: 16 x 7.5 - 8 Front 9 x 3.5 - 4	Length / Width 32: 74"/33.5" 36: 75"/36.5" 48: 74"/49" Weight 32: 560 lbs. - 562 lbs. 36: 570 lbs. - 584 lbs. 48: 639 lbs. - 650 lbs.	Cut Height Range 1.5" - 4.25" Type 32: Fixed-side discharge 36/48: Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System 32: Shims, Fixed Deck 36/48: Shims, Floating Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3)
LC	52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 5.5 mph Acres/Hour 52: 2.94 61: 3.44	Rear 18 x 8.5 - 8 Front 11 x 4 - 5	Length / Width 52: 81.5" / 53" 61: 84"/62" Weight 52: 705 lbs. - 740 lbs. 61: 761 lbs. - 790 lbs.	Cut Height Range 1.5" - 4.25" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Shims, Floating Deck Blades 52: 18" (3) 61: 21" (3)
GC	32" Kawasaki® FS541R 15HP 36" Kawasaki® FS541R 15HP 48" Kawasaki® FS541R 15HP	Gear Box Peerless 5 speed with reverse	Fuel Capacity 5.5 gal. Speed 5.2 mph Acres/Hour 32: 1.76 48: 2.57 36: 1.92	Rear 32: 13 x 5 - 6 36: 13 x 6.5 - 6 48: 13 x 6.5 - 6 Front 9 x 3.5 - 4	Length / Width 32: 74" / 33.5" 36: 75" / 36.5" 48: 74" / 49" Weight 32: 441 lbs. 36: 463 lbs. 48: 551 lbs.	Cut Height Range 1.5" - 4.25" Type 32: Fixed-side discharge 36/48: Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System 32: Shims, Fixed Deck 36/48: Shims, Floating Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3)

*chute up dimensions

Z & Z_{TO}





DURABLE & COMFORTABLE.

The MMZ and ZTO offer a range of medium to heavy options for any job. The MMZ is equipped with a solid pump and motor drive system allowing for the larger engine's weight to be lower to the ground and wider tire stance for great traction and responsiveness. The ZTO is similar in size with integrated transmissions and mid-sized engines.



Simple construction, durable and easy to work on.




Premium suspension seat on MMZ and generously bolstered seat on ZTO.



Powered collection system available in two and three bag configurations.



Dual tanks provide 13.5 gals of fuel capacity, much more than comparable machines in this class.

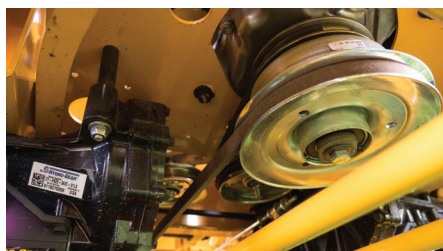

Dual deck belts reduce wear on the angled belt drive and insure that all idlers are on the slack side of the belt which significantly extends belt life.



Deck lift system uses stainless steel shafting and synthetic bushings providing many years of service free durability.

SPECS

	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
Z™	52" Kawasaki® FX850 27HP 61" Kawasaki® FX850 27HP	Pumps Hydro-gear® 16 cc Motors Danfoss 15 cu in	Fuel Capacity 13.5 gal. Speed 13 mph Acres/Hour 52: 6.96 61: 8.14	Rear 52: 24 x 9.5 - 12 61: 24 x 12 - 12 Front 13 x 6.5 - 6	Length / Width 52: 78" / 53" 61: 78" / 62" Weight 52: 1213 lbs. 61: 1235 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Foot Pedal Operated Blades 52: 18" (3) 61: 21" (3)
Z_{TO}	48" Kawasaki® FX730 23.5HP 52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Transaxle Hydro-gear® ZT3400	Fuel Capacity 13.5 gal. Speed 10.5 mph Acres/Hour 48: 5.2 61: 6.58 52: 5.62	Rear 48: 23 x 10.5 - 12 52: 24 x 12 - 12 61: 24 x 12 - 12 Front 13 x 5 - 6	Length / Width 48: 78" / 49" 52: 78" / 53" 61: 78" / 62" Weight 48: 1080 lbs. 52: 1102 lbs. 61: 1157 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Foot Pedal Operated Blades 48: 16.5" (3) 52: 18" (3) 61: 21" (3)

*chute up dimensions

STAND-ON

The stand-on mowing revolution started right here. Today's Standers are more refined, agile, and well balanced than ever before.



Product Name	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
<u>STANDER B</u>	48" Kawasaki® FS651 22hp 52" Kawasaki® FS651 22hp	Transaxle Hydro-gear® ZT-3100	Fuel Capacity 5 gal. Speed 7 mph Acres/Hour 48: 3.3 52: 3.6	Rear 20 x 10.00 - 8.00 4 ply Front 11 x 4.00 - 5.00 4 ply pneumatic	Length / Width 48: 65.75" / 49" 52: 65.75" / 53" Weight 48: 780 lbs. 52: 800 lbs.	Cut Height Range 2" - 5" Type Floating-side discharge Construction Square Nosed 11 Gauge Laminate Lift System Quick-Cut Blades 48: 16.5" (3) 52: 18" (3)
<u>STANDER I</u>	36" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kohler® ZT710 20.2HP 42" Kawasaki® FX600 19HP 48" Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP Kohler® ZT730 22.1HP 52" Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP Kohler® ZT730 22.1HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 8.2 mph Acres/Hour 36: 3.02 42: 3.52 48: 4.06 52: 4.39	Rear 36: 18 x 8.5 - 10 42: 18 x 8.5 - 10 48: 18 x 10.5 - 10 52: 18 x 10.5 - 10 Front 11 x 4 - 5	Length / Width 36: 62" / 36.5" 42: 70" / 42.5" 48: 59.75" / 49" 52: 59.75" / 53" Weight 36: 717 lbs. - 728 lbs. 42: 740 lbs. 48: 805 lbs. 52: 816 lbs.	Cut Height Range 1" - 5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 36: 18" (2) 42: 21" (2) 48: 16.5" (3) 52: 18" (3)
<u>STANDER X</u>	48" Kawasaki® FX730 23.5HP 52" Briggs & Stratton 49E8 28HP Kohler® ECV749 26.5HP Kawasaki® FX730 23.5HP 61" Kohler® ECV749 26.5HP Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans Motors Danfoss 15 cu in	Fuel Capacity 8 gal. Speed 9.5 mph Acres/Hour 48: 4.7 52: 5.09 61: 5.95	Rear 20 x 10 - 8 Front 13 x 5 - 6	Length / Width 48: 65" / 49" 52: 66" / 53" 61: 67" / 62" Weight 48: 900 lbs. 52: 920 lbs. 61: 980 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 48: 16.5" (3) 61: 21" (3) 52: 18" (3)
<u>STANDER ZK</u>	52" Briggs & Stratton 61E8 37HP Kawasaki® FX850 27HP 61" Briggs & Stratton 61E8 37HP Kawasaki® FX850 27HP 72" Briggs & Stratton 61E8 37HP	Pumps Hydro-gear® 16 cc with fans Motors Hydro-gear® 15 cu in Intg. brake, Indiv. hydro rsrv.	Fuel Capacity 15.5 gal. Speed 12.5 mph Acres/Hour 52: 6.69 61: 7.83 72: 9.22	Rear 52: 23 x 10.5 - 12 61: 24 x 12 - 12 72: 24 x 12 - 12 Front 13 x 6.5 - 6	Length / Width 52: 67" / 53" 61: 69.5" / 62" 72: 72" / 73" Weight 52: 1036 lbs. - 1062 lbs. 61: 1124 lbs. 72: 1202 lbs.	Cut Height Range 1.5" - 5.5" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Quick-Cut Blades 52: 18" (3) 72: 24.5" (3) 61: 21" (3)
<i>SM</i>	32" Kawasaki® FS541 15HP Kawasaki® FS600 18.5HP Kohler® ZT710 20.2HP 36" Kawasaki® FS541 15HP Kawasaki® FS600 18.5HP Kohler® ZT710 20.2HP	Pumps Hydro-gear® 10 cc with fans Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 7.5 mph Acres/Hour 32: 2.54 36: 2.77	Rear 32: 18 x 6.5 - 8 36: 18 x 8.5 - 8 Front 11 x 4 - 5	Length / Width 32: 58" / 33.5" 36: 60" / 36.5" Weight 32: 639 lbs. - 650 lbs. 36: 650 lbs. - 661 lbs.	Cut Height Range 32-36: 1.75" - 4.5" 48-61: 1.25" - 5" Type Fixed-side discharge Construction 32-36: Standard, 7 Ga. Steel 48-61: Aero Core™, 7 Ga. Steel
<i>LG</i>	48" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kawasaki® FS600 18.5HP 52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans Motors Danfoss 15 cu in	Fuel Capacity 5.5 gal. Speed 9.5 mph Acres/Hour 48: 4.7 52: 5.09 61: 5.95	Rear 20 x 10 - 8 Front 13 x 5 - 6	Length / Width 48: 59.25" / 49" 52: 59.87" / 53" 61: 62.5" / 62" Weight 48: 849 lbs. 52: 871 lbs. 61: 1003 lbs.	Blades 32: 16.5" (2) 52: 18" (3) 36: 18" (2) 61: 21" (3) 48: 16.5" (3)

*chute up dimensions



SIT

With the option to sit or stand you can adapt to the terrain depending on where the mower needs traction.

Product Name	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
<i>SPORT I</i>	36" Kawasaki® FS600 18.5HP Kawasaki® FX600 19HP Kohler® ZT710 19HP	Pumps Hydro-gear® 10 cc	Fuel Capacity 5.5 gal.	Rear 36: 18 x 8.5 - 10 48: 18 x 10.5 - 10 52: 18 x 10.5 - 10	Length / Width 36: 65.5" / 36.5" 48: 63.75" / 49" 52: 63.75" / 53"	Cut Height Range 1" - 5"
	48" Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP Kohler® ZT730 23HP	Motors Danfoss 12 cu in	Speed 8.2 mph	Front 11 x 4 - 5	Weight 36: 772 lbs. 48: 860 lbs. 52: 871 lbs.	Type Floating-side discharge
	52" Kawasaki® FX600 19HP Kawasaki® FX730 23.5HP Kohler® ZT730 23HP		Acres/Hour 36: 3.02 48: 4.06 52: 4.39		Construction Aero Core™, 7 Gauge Steel	Lift System Quick-Cut
<i>SPORT X</i>	48" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 12 cc with fans	Fuel Capacity 8 gal.	Rear 20 x 10 - 8	Length / Width 48: 68" / 49" 52: 68" / 53" 61: 70.5" / 62"	Cut Height Range 1.5" - 5.5"
	52" Kawasaki® FX730 23.5HP	Motors Danfoss 15 cu in	Speed 9.5 mph	Front 13 x 5 - 6	Weight 48: 951 lbs. 52: 961 lbs. 61: 1031 lbs.	Type Floating-side discharge
	61" Kawasaki® FX730 23.5HP		Acres/Hour 48: 4.7 52: 5.09 61: 5.95		Construction Aero Core™, 7 Gauge Steel	Lift System Quick-Cut
<i>Z</i>	52" Kawasaki® FX850 27HP	Pumps Hydro-gear® 16 cc	Fuel Capacity 13.5 gal.	Rear 52: 24 x 9.5 - 12 61: 24 x 12 - 12	Length / Width 52: 78" / 53" 61: 78" / 62"	Cut Height Range 1.5" - 5.5"
	61" Kawasaki® FX850 27HP	Motors Danfoss 15 cu in	Speed 13 mph	Front 13 x 6.5 - 6	Weight 52: 1213 lbs. 61: 1235 lbs.	Type Floating-side discharge
			Acres/Hour 52: 6.96 61: 8.14		Construction Aero Core™, 7 Gauge Steel	Lift System Foot Pedal Operated
<i>Z_{TO}</i>	48" Kawasaki® FX730 23.5HP	Transaxle Hydro-gear® ZT3400	Fuel Capacity 13.5 gal.	Rear 48: 23 x 10.5 - 12 52: 24 x 12 - 12 61: 24 x 12 - 12	Length / Width 48: 78" / 49" 52: 78" / 53" 61: 78" / 62"	Cut Height Range 1.5" - 5.5"
	52" Kawasaki® FX730 23.5HP		Speed 10.5 mph	Front 13 x 5 - 6	Weight 48: 1080 lbs. 52: 1102 lbs. 61: 1157 lbs.	Type Floating-side discharge
	61" Kawasaki® FX730 23.5HP		Acres/Hour 48: 5.2 52: 5.62 61: 6.58		Construction Aero Core™, 7 Gauge Steel	Lift System Foot Pedal Operated
					Blades 48: 16.5" (3) 52: 18" (3) 61: 21" (3)	

*chute up dimensions

WALK-BEHIND

Velke™ Walk Behinds are perfectly balanced for optimal control on hill and minimal turf damage. Offered in both comfort grip and pistol grip.



Product Name	Engine & Deck Options	Drivetrain	Productivity	Tires	Dimensions	Deck
<u>VELKE™ HC</u>	32" Kawasaki® FS600 18.5HP 36" Kawasaki® FS600 18.5HP 48" Kawasaki® FS600 18.5HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 5.5 mph Acres/Hour 32: 1.86 36: 2.03 48: 2.72	Rear 32: 16 x 6.5 - 8 36: 16 x 7.5 - 8 48: 16 x 7.5 - 8 Front 9 x 3.5 - 4	Length / Width 32: 74"/33.5" 36: 75"/36.5" 48: 74"/49" Weight 32: 560 lbs. - 562 lbs. 36: 570 lbs. - 584 lbs. 48: 639 lbs. - 650 lbs.	Cut Height Range 1.5" - 4.25" Type 32: Fixed-side discharge 36/48: Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System 32: Shims, Fixed Deck 36/48: Shims, Floating Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3)
<u>VELKE™ LC</u>	52" Kawasaki® FX730 23.5HP 61" Kawasaki® FX730 23.5HP	Pumps Hydro-gear® 10 cc Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 5.5 mph Acres/Hour 52: 2.94 61: 3.44	Rear 18 x 8.5 - 8 Front 11 x 4 - 5	Length / Width 52: 81.5" / 53" 61: 84"/62" Weight 52: 705 lbs. - 740 lbs. 61: 761 lbs. - 790 lbs.	Cut Height Range 1.5" - 4.25" Type Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System Shims, Floating Deck Blades 52: 18" (3) 61: 21" (3)
<u>VELKE™ GC</u>	32" Kawasaki® FS541R 15HP 36" Kawasaki® FS541R 15HP 48" Kawasaki® FS541R 15HP	Gear Box Peerless 5 speed with reverse	Fuel Capacity 5.5 gal. Speed 5.2 mph Acres/Hour 32: 1.76 36: 1.92 48: 2.57	Rear 32: 13 x 5 - 6 36: 13 x 6.5 - 6 48: 13 x 6.5 - 6 Front 9 x 3.5 - 4	Length / Width 32: 74" / 33.5" 36: 75" / 36.5" 48: 74" / 49" Weight 32: 441 lbs. 36: 463 lbs. 48: 551 lbs.	Cut Height Range 1.5" - 4.25" Type 32: Fixed-side discharge 36/48: Floating-side discharge Construction Aero Core™, 7 Gauge Steel Lift System 32: Shims, Fixed Deck 36/48: Shims, Floating Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3)
<u>VELKE™ HYDRO</u>	32" Kawasaki® FS541 15HP 36" Kawasaki® FS541 15HP Kawasaki® FS600 18.5HP 48" Kawasaki® FS600 18.5HP 52" Kawasaki® FS600 18.5HP	Pumps Hydro-gear® 10 cc with fans Motors Danfoss 12 cu in	Fuel Capacity 5.5 gal. Speed 32: 6.5 mph 36: 7.2 mph 48: 7.2 mph 52: 7.2 mph Acres/Hour 32: 2.2 36: 2.65 48: 3.56 52: 3.85	Rear 32: 16 x 4.8/4 - 8 36: 18 x 6.5 - 8 48: 18 x 8.5 - 8 52: 18 x 8.5 - 8 Front 9 x 3.5 - 4	Length / Width 32: 72" / 33.5" 36: 74" / 36.5" 48: 69" / 49" 52: 71.5" / 53" Weight 32: 540 lbs. 36: 562 lbs. 48: 694 lbs. 52: 717 lbs.	Cut Height Range 1.5" - 4.25" Type Fixed-side discharge Construction Standard, 7 Gauge Steel Lift System Shims, Fixed Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3) 52: 18" (3)
<u>VELKE™ GEAR</u>	32" Kawasaki® FS541 15HP 36" Kawasaki® FS541 15HP 48" Kawasaki® FS541 15HP	Gear Box Peerless 5 speed with reverse	Fuel Capacity 5.5 gal. Speed 4.5 mph Acres/Hour 32: 1.52 36: 1.66 48: 2.23	Rear 32: 13 x 5 - 6 36: 13 x 6.5 - 6 48: 13 x 6.5 - 6 Front 9 x 3.5 - 4	Length / Width 32: 74" / 33.5" 36: 79" / 36.5" 48: 70" / 49" Weight 32: 485 lbs. 36: 518 lbs. 48: 562 lbs.	Cut Height Range 1.5" - 4.25" Type Fixed-side discharge Construction Standard, 7 Gauge Steel Lift System Shims, Fixed Deck Blades 32: 16.5" (2) 36: 18" (2) 48: 16.5" (3)

*chute up dimensions

ENGINE GUIDE

Use the engine guide below to see the differences in our engine section.

	Engine Model			Displacement (cc)	Mfg. Rated Power (HP)	Torque (ft-lbs) at RPM
Base	Kawasaki®	FS	FS541V	603	15	31.0 @ 1800
	Kawasaki®	FS	FS600V	603	18.5	32.5 @ 2200
	Kawasaki®	FX HD Air Cleaner	FX600V	603	19	32.5 @ 2200
	Kohler ®	Confidant®	ZT710	725	19	40.0 @ -----
Medium	Kohler ®	Confidant®	ZT730	747	23	42.1 @ -----
	Kawasaki®	FX HD Air Cleaner	FX730V	726	23.5	39.9 @ 2400
	Kohler ®	Command Pro® EFI	ECV749	747	26.5	40.9 @ -----
	Briggs	Vanguard™ EFI	49E9	724	28	-----
Large	Kawasaki®	FX HD Air Cleaner	FX850V	852	27	44.6 @ 2400
	Briggs	Vanguard™ EFI	61E8	993	37	-----

Engine Power Rating:

Kawasaki® engines rated per SAE J1995 (gross) power testing with (98% + 3rd party verification) SAE J2723 labeling/rating Kohler ® and Briggs & Stratton rated per SAE J1995 (gross) power testing with revised (95%) SAE J1940 labeling/rating

Note that all engines are rated at full throttle and do not necessarily account for governor losses. Also, when mowing under heavy conditions, most operators will draw down the engine speed closer to peak torque speed where the peak torque ratings may be a closer indication of performance.

Approximate Engine Price Increments:

FS600E -> ZT710E +\$110 plus 0.5HP, canister air cleaner, and lots of cooling

FX730E -> ZT730E +\$-420 big savings, and 5HP less

FX730E -> ECV749E +\$440 plus 3HP and EFI

FX730E -> 49E8E +\$30 great value plus 4.5HP and EFI

FX850E -> 61E8 +\$700 plus EFI, 10HP and tons of power!

TWEEL™ GUIDE

Use the Tweel™ guide below or approved applications.



Mower	Tweel Size/Type	ZK Only
Stander I/Sport I (48"/52")	18.5" Tweel	
Stander X/Sport X	18.5" Tweel	
ZK	24" 4 lug Tweel	Replace 5 lug hub with 4 lug hub PN 72410063
MMZ	24" 4 lug Tweel	

THE FINISHING TOUCHES

GRASS COLLECTION ACCESSORIES

Our grass collection accessories are built to stand up to hard use season after season. They're engineered to fit Wright mowers as well as other professional brands.

GRASS GOBBLER™



Mower	Gobbler™
Exmark Viking, Metro, E, S, X series.	GG450 / GGJ550
Gravely 2002 & later Pro G & H/Pro Turn, Pro Walk	WRJ300-3
Deere 7-iron	JD200-2 / JDJ300-3
Wright type Deere	JDJ500-HD
Ransomes/Bobcat 94' & Later	GG250 / GGJ350
Ransomes/Bobcat 01' & Later Floating Deck	TE250 / TEJ350
Ransomes/Bobcat 01' & Fixed Deck	GG450 / GGJ550
Scag	SC200-2 / SCJ300-3
Scag Advantage	SA200-2 / SAJ300-3
Scag Velocity	SVJ300-3
Ferris, Snapper, Simplicity (ICD type deck)	FS200-2/FSJ300-3
Toro Floating Deck 01' & Later & Turbo Force	TOJ350
Wright Original	WR200-2 / WRJ300-3
Wright Aero Core™	WRJ500-5
Leaf Gobbler™ fits all Jumbo	LG1000

*All models with "J" are Jumbo with 4.3 cu-ft

**All other models are regular with 3.3 cu-ft

POWERED GRASS COLLECTION SYSTEM

Three bag system capacity is 12 bushels. Two bag system capacity is 8 bushels



Part Number	Model
98320095	GCS, TWIN RECEPTACLE, 48 AERO-CORE™
98320096	GCS, TWIN RECEPTACLE, 52 AERO-CORE™
98320097	GCS, TRIPLE RECEPTACLE, 52 AERO-CORE™
98320098	GCS, TRIPLE RECEPTACLE, 61 AERO-CORE™

COLLECTION BAG

Provides a place to put trash and debris while on the go.



Part Number	Model
95490014	Stander® X/Stander® Large (WSTX/WSLG)
95490015	Stander® I/Stander® Small (WSTN/WSS)
95490016	Velke™ HC/Velke™ LC/Velke™ PISTOL GEAR (WVHC/WVLC/WVGC)
95490017	Stander® ZK (WSZK)

RIDE-BEHIND ACCESSORIES

Velke™ sulkies give operators a smoother, more comfortable ride, and help increase productivity. Each is engineered to work on Wright models as well as other professional mower brands.

VELKE SULKY™



P/N: **VK**; Velke™ Sulky, Pro 1

- Increases comfort and productivity
- Patented design keeps you closer to handles and away from obstacles
- Strong welded steel constructions
- Fits most professional brands
- Operator capacity of approximately 200lbs.

VELKE X2 SULKY™



P/N: **VKX2**; Velke™ Sulky, X-2

Same great features as the Velke™ Sulky, plus:

- Wide, open platform for greater operator comfort
- The only two wheel sulky available
- Operator capacity of approximately 280lbs.

MULCH KITS

Mulch kits give you a great alternative to collecting clippings and leaves. The recirculating baffles break down clippings into small and easily biodegradable pieces.



Deck Size	Aero Core™	Reg. 5" Deck	ZK-6" Deep Deck-Only
32"	95460029	95480003	
36"	95480005	95470002	
42"	95480006	95480002	
48"	95430009	95430003	
52"	95440011	95440003	95440008
61"	95450011	95450003	95450007
72"	98460069	98460069	



Blade Length	Blade Type	Deck Size	Part Number
16 1/2"	Standard	32", 48"	71440002
18"	Standard	36", 52"	71440001
21"	Standard	42", 61"	71440003
24 1/2"	Standard	72"	71440004
16 1/2"	Mulching	32", 48"	71490001
18"	Mulching	36", 52"	71490002
21"	Mulching	42", 61"	71490003

THE FINISHING TOUCHES

ADDITIONAL PARTS

Additional parts for servicing and other accessories.



Parts

Hydro Filter

15W-50 Hydro Oil

Easy on/off block plate

Fire Extinguisher bracket

Trimmer holder

Part Number

34490002

36490013

93460215

98490021

98470106

For WSTX and WSZK

ZK ADD-ONS

Add-ons for the Stander ZK.



Add-Ons

ZK tractor weight kit, 100 lbs.

Dual wheel kit*

**For 72" models ONLY*

Part Number

95410044

95410045

STANDER B ADD-ONS

Add-ons for the Stander B.



Parts

Bag Kit

Flat-free caster wheel

Stripe Kit

Part Number

95490020

93410558

98460074

Warranty Info: WSB: 1-year unlimited hours for commercial users and 3-year or 500 hours for non-commercial users.
All other models: 2-year unlimited hours for commercial users and 5-year or 500 hours for non-commercial users

Questions?

www.wrightmfg.com: To find detailed information about our mowers, Owner's Manuals, find a dealer, service documents and more.

Sales@wrightmfg.com: For sales questions about mower models, accessories and more.

Service@wrightmfg.com: For service questions about mowers, accessories and more.

4600 WEDGEWOOD BLVD STE X

FREDERICK MD 21703-7167

301.360.9810

WRIGHTTM

OWNERS GROUP

Wright Owners make up a community of people with many of the same goals; to build successful and reliable landscape businesses. We work to bring our partners together to share ideas and inspire each other to greater perfection. Wright Owners can sign up at wolf.wrightmfg.com as well as join our private Wright Owners Facebook group. We want to stay in touch, see your work, and hear your feedback—and our future depends on it.

Stay connected with us!



@WrightCommercialProducts



@Wright_Mowers



@WrightMowers



@WrightCommercialProducts







4600 WEDGEWOOD BLVD STE X
FREDERICK MD 21703-7167 | 301.360.9810

©1997-2019 Wright Manufacturing, Inc.
All rights reserved. Stander®, Intensity, ZK & X
are trademarks of Wright Manufacturing, Inc.

2019 EDITION

